

PCTWORLD INTELLECT
Inu

INTERNATIONAL APPLICATION PUBLISHED


WO 9604722A2

(51) International Patent Classification 6 : H04B 7/26, H04Q 7/38		A:	(43) International Publication Date: 15 February 1996 (15.02.96)
(21) International Application Number: PCT/FI95/00412		(81) Designated States: AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LT, LU, LV, MD, MG, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, MW, SD, SZ, UG).	
(22) International Filing Date: 2 August 1995 (02.08.95)		Published <i>In English translation (filed in Finnish). Without international search report and to be republished upon receipt of that report.</i>	
(30) Priority Data: 943609 3 August 1994 (03.08.94) FI			
(71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Mäkkylän puistotie 1, FIN-02600 Espoo (FI).			
(72) Inventors; and (75) Inventors/Applicants (for US only): SÄRKIOJA, Juha [FI/FI]; Linnankatu 15 B 16, FIN-90100 Oulu (FI). SUONVIERI, Jukka [FI/FI]; Kottikuusentie 2 C 2, FIN-90240 Oulu (FI).			
(74) Agent: TEKNOPOLOIS KOLSTER OY; Oy Kolster Ab, Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).			

(54) Title: METHOD FOR CHANNEL ALLOCATION IN A CELLULAR COMMUNICATION SYSTEM

(57) Abstract

The invention relates to a method for allocating radio channels in a cellular communication system, each cell comprising at least one base station (BTS) communicating with the subscriber terminal equipments (MS) by means of a traffic channel specific for each connection, in which method the base station monitors the quality of the available traffic channels. For improving the service ability of the cellular communication system, in the method of the invention upon selecting the traffic channel for the connection between the base station and the terminal equipment, the quality of the connection required by the terminal equipment and the interference level of each possible traffic channel are taken into account.

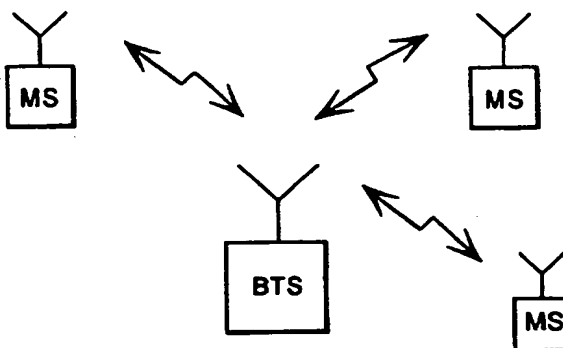

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LJ	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

WO 96/04722

PCT/FI95/00412

1

Method for channel allocation in a cellular communication system

5 The invention relates to a method for allocating radio channels in a cellular communication system, each cell comprising at least one base station communicating with the subscriber terminal equipments within its area by means of a traffic channel specific for each connection, in which method the base station
10 monitors the quality of the available traffic channels.

In cellular communication systems the quality of the connection between the base station and the subscriber terminal equipments varies as a function of time and location. On average, the remoter the terminal
15 equipments are from the base station, the more signal attenuation occurs on the radio path, but other factors, such as visual obstructions and external interferences also affect the quality of the signal at the receiving end.

20 The attenuation of the signal also depends on the used frequency. Thus, if the frequency difference between two signals is sufficient, their attenuations do not correlate. For instance, a frequency difference of 1 MHz is sufficient, so that the attenuations of the
25 signals are independent of each other. Due to this frequency selective attenuation, several cellular communication networks have introduced the frequency hopping technique. This means that the frequency used on the connection is varied at predetermined intervals.
30 Thus, the effect of the frequency selective attenuation may be averaged, and similarly, the harmful effect of narrowband interference signals on the desired signal is reduced.

35 In several systems part of the channels used by the base station are frequency hopping and part of

WO 96/04722

PCT/FI95/00412

2

the channels use fixed frequencies. This is necessary since some of the signalling channels must be transmitted on a certain frequency, so that the terminal equipment could find them. Owing to this, among other things, various traffic channels of the base station may have quite different interference levels.

✓ In present systems when a traffic channel is being allocated for the connection between a terminal equipment and the base station either in connection with call set-up or handover, those traffic channels are searched from the available traffic channels of the base station which are currently free, and their Idle Channel Interference level is checked. One of those idle channels with the lowest interference level is randomly allocated for the use the terminal equipment.

The drawback of the method described above is that it does not take into account the different character of various channels and the conditions in which each terminal equipment currently is. The characteristics of various channels are thus not utilized in the best possible way.

The object of the present invention is thus to implement a new method for channel allocation, with which method the above mentioned drawbacks may be avoided, and the service ability of the cellular communication system may thus be improved.

This is achieved with a method of the type set forth in the introduction, which is characterized in that upon selecting the traffic channel for the connection between the base station and the terminal equipment, the quality of the connection required by the terminal equipment and the interference level of each possible traffic channel are taken into account.

The method of the invention may be particularly applied so that an attempt is made for providing the

WO 96/04722

PCT/FI95/00412

3

connection to be established just a sufficiently good
radio channel. The radio channels may be classified on
the basis of the interference level obtained by means
of measurements, and of the effect of frequency hopping.

5 A traffic channel enabling a high quality of the
connection may be given to a terminal equipment behind
a poor connection, whereas, for instance, a traffic
channel containing more interference may be given to a
terminal equipment located near the base station, since
10 the quality of the connection is sufficient in any case.
Thus, the characteristics of the channels may be
effectively utilized, and the quality and the success
probability of the calls of the system are higher than
what has been possible before.

15 In the following, the invention will be
described in closer detail with reference to the
examples in accordance with the attached drawings, in
which

20 Figure 1 shows a diagram of a cellular
communication system in which the method of the
invention may be applied,

Figure 2 shows a diagram of the levels of the
connections within the area of a base station,

25 Figure 3 illustrates an example of a possible
frequency group division of a base station,

Figure 4 illustrates a second example of a
possible frequency group division of a base station,

30 Figure 5 illustrates an example of the effect
of the location of a terminal equipment on channel
allocation, and

Figure 6 illustrates a situation where handover
is carried out in the boundary area between two base
stations.

35 Figure 1 thus illustrates a cellular
communication system in which the method of the

WO 96/04722

PCT/FL95/00412

4

invention may be applied. The cellular communication system comprises a base station BTS which communicates with the subscriber terminal equipments MS within its area, so that each terminal equipment has a traffic channel of its own.

Figure 2 illustrates the basic idea of the method of the invention. The figure shows a diagram of the level of the connection of the calls maintained by one base station. The horizontal axis 20 of the diagram represents the quality of the calls, which can be measured e.g. by means of the bit-error ratio. The vertical axis of the diagram represents the number of the calls. In a normal case, in which there is a plurality of calls, the quality distribution is similar to the case shown in the figure, resembling the Gauss curve. In the method of the invention, the terminal equipments 22 having a poor quality of a connection are allocated in the base station such a traffic channel that has a low interference level. Accordingly, the terminal equipments 23 having a high quality of a connection may be allocated a traffic channel with a higher interference level.

In the following, the invention will be described in greater detail, by way of example of the digital GSM cellular communication system in which frequency hopping is used. However, the invention is not limited thereto, since the invention may naturally also be applied in other cellular communication systems.

When frequency hopping is applied on the radio path, the traffic channels used by the base station may be divided into groups having different frequency hopping parameters. These groups are termed as hopping groups. In the GSM system, division into groups of this kind is necessary owing to the special characteristics of the carrier wave frequency contained by the BCCH

WO 96/04722

PCT/FI95/00412

5

signalling channel. The BCCH signal must be on such a frequency that is known to all terminal equipments all the time, and the channel in question thus does not frequency hop. Furthermore, the BCCH frequency is continuously transmitted with the highest allowable transmission power.

Figure 3 illustrates an example of a typical frequency group division in a base station which comprises four transmitter units TRX, the first of which transmitting a BCCH signal in a first time-slot TS0. The traffic channels are divided into three hopping groups: HG0, HG1 and HG2. The first group comprises the time-slot TS0 of the first transmitter TRX1; this time-slot comprises the BCCH signal and it does not hop. The second group comprises the first time-slots TS0 of the other transmitters TRX2...TRX4, which time-slots hop by using three frequencies of the transmitters. The third hopping group comprises other time-slots that frequency hop by using four frequencies.

In the frequency group arrangement described above, only the number of frequencies corresponding to the number of separate transmitters is used. It is also possible to apply so-called synthesized hopping, which is carried out by means of fast tunable voltage controlled oscillators. It is then possible to control the operation of each transmitter, so that it can change the transmission frequency specifically in each time-slot. It is then possible to use more frequencies than there are transmitters in the base station. A frequency group division of this kind is illustrated in Figure 4.

In the base station in accordance with the example, only two transmitters TRX1 and TRX2 are in use. The traffic channels are divided into two hopping groups HG0 and HG1. All time-slots of the second transmitter belong to hopping group HG1, and it is assumed that they

WO 96/04722

PCT/FI95/00412

6

hop on four frequencies by using synthesized hopping. So that all time-slots of the second transmitter would have a free access to the most of the frequencies, all time-slots of the first transmitter TRX1 are transmitted on a fixed frequency due to the special requirements of the BCCH channel.

The frequency arrangement described above is advantageous in a small base station, but it leads to a situation in which a half of the traffic channels are hopping, and another half of the channels are on a fixed frequency. The base station thus has traffic channels of two kinds, the characteristics of which differ from each other a great deal as to interferences and propagation conditions.

The method of the invention may be applied particularly advantageously in a base station of the kind described above, since traffic channels of various types may effectively be utilized so that each connection is allocated such a channel the characteristics of which are the best from the point of view of the totality.

In a preferred embodiment of the method of the invention, upon selecting the traffic channel for the connection between the terminal equipment and the base station, the quality of the signal received at the base station and at the terminal equipment is taken into account, as well as the power level of the connection measured both at the terminal equipment and the base station, the distance of the terminal equipment from the base station, the interference level of free traffic channels, and the signal-to-noise ratio required for a sufficient signal quality. The signal-to-noise ratio is a system parameter and depends e.g. on the used modulation and coding methods.

WO 96/04722

PCT/FI95/00412

7

The quality of the received signal at the base station and the terminal equipment may be measured e.g. by means of the bit-error ratio. The distance of the terminal equipment from the base station is indicated by the timing advance parameter (TA), which is used for replacing the propagation delay occurring on the radio path.

The need for allocating channels in cellular communication systems arises in three possible situations: in connection with call set-up, intracell handover, and inter-cell handover. In the following, applying the method of the invention will be disclosed separately in each case.

Call set-up

In connection with call set-up, the decision on the channel type (hopping or non-hopping) to be allocated for a terminal equipment must be taken relatively quickly compared with the time that passes until reliable measurement results of the signal quality and the received power are obtained on different channel types. Therefore, the only available parameters that may be taken into account when channel allocation is carried out are the idle channel interference level (ICIL) and the timing advance indicating (TA) the distance.

Since there are no accurate measurement results of the conditions of the terminal equipments in connection with call set-up yet, a non-hopping traffic channel should be allocated for use only if the available information indicates that the terminal equipment is in highly favourable conditions, i.e. in the vicinity of the base station, and there is a non-hopping traffic channel free of interference available. It can be applied as a basic rule that in connection with call set-up, a frequency hopping traffic channel is selected if the interference of the free channel is

WO 96/04722

PCT/FI95/00412

8

not higher than that of any other non-hopping channel.
Expressed as an algorithm:

```
5      If ICIL(HCH) ≤ ICIL(NHCH),  
      then select HCH  
      else select NHCH;
```

in which HCH represents a hopping channel and NHCH a non-hopping channel.

```
10      The distance of the terminal equipment can also  
      be taken into account when the channel is being  
      allocated. The importance of the distance varies  
      depending on the cell size and the environment. Figure  
15      5 illustrates one possible way of implementation for  
      taking the distance into account. The figure shows a  
      base station BTS, and the radius of its audibility range  
      is marked with R. A terminal equipment MS is within the  
      audibility range of the base station setting up a  
      connection with the base station. The operator of the  
20      system may set the system parameter TAREF which  
      indicates with the aid of the timing advance the  
      distance within the limits of which the terminal  
      equipments may be assigned a non-hopping traffic  
      channel, provided that the interference of the free non-  
25      hopping channel is not higher than that on any other  
      channel. Expressed in a form of an algorithm:
```

```
30      If TA < TAREF and ICIL(NHCH) ≤ ICIL(HCH),  
      then select NHCH  
      else select HCH.
```

```
35      The shown algorithms favour frequency hopping traffic  
      channels, which means that once a call has been set up,  
      an intracell handover is carried out onto a non-hopping  
      frequency on connections that have proved to be good,
```

WO 96/04722

PCT/FI95/00412

9

so that there are always hopping traffic channels available for new connections.

Intracell handover

5 An object of the intracell handover is to provide a better traffic channel for use of a terminal equipment having a poor connection. Furthermore, in the method of the invention, the traffic load between hopping and non-hopping channels is evened out by means
10 of the intracell handover.

The criteria applied in the intracell handover depend on whether a hopping or a non-hopping traffic channel is in use.

15 A few seconds after a connection has been set up between the terminal equipment and the base station, reliable and averaged measurement results of the quality of the connection and the power level both at the base station and the subscriber terminal equipment are obtained. In most cases where frequency hopping is of
20 avail, the improvement is noticed in the quality of the received signal. This quality may be used as the main criterion in the intracell handover.

The following four presettable threshold values may be used as criteria in connection with handover:

25 RX_QUAL_HO_HCH_DL: the threshold value of the quality of the signal received at the base station when an intracell handover from a hopping channel onto a non-hopping channel is carried out.

30 RX_QUAL_HO_NHCH_DL: the threshold value of the quality of the signal received at the base station when an intracell handover from a non-hopping channel onto a hopping channel is carried out.

 RX_QUAL_HO_HCH_UL: the threshold value of the quality of the signal received at the terminal equipment

WO 96/04722

PCT/FI95/00412

10

when an intracell handover from a hopping channel onto a non-hopping channel is carried out.

5 RX_QUAL_HO_NHCH_UL: the threshold value of the quality of the signal received at the terminal equipment when an intracell handover from a non-hopping channel onto a hopping channel is carried out.

10 If the terminal equipment is on a hopping traffic channel, in a preferred embodiment of the invention the handover is carried out onto a non-hopping channel if the quality of the signal received by the base station from the terminal equipment is higher than the preset threshold value and if the quality of the signal received by the terminal equipment from the base station is higher than the preset threshold value. The
15 quality of the connection must thus be high in both transmission directions. Expressed in a form of an algorithm, using the above abbreviations:

20 If RX_QUAL_DL < RX_QUAL_HO_HCH_DL
 and RX_QUAL_UL < RX_QUAL_HO_HCH_UL
 then execute handover HCH -> NHCH.

25 If the terminal equipment is on a non-hopping traffic channel, in a preferred embodiment of the invention the handover is carried out onto a hopping channel provided that either the quality of the signal received by the base station from the terminal equipment is poorer than the preset threshold value or the quality of the signal received by the terminal equipment from
30 the base station is poorer than the preset threshold value. The handover thus takes place if the transmission quality is poor in either of the transmission directions. Expressed as an algorithm, using the above abbreviations:

35

WO 96/04722

PCT/FI95/00412

11

If RX_QUAL_DL > RX_QUAL_HO_NHCH_DL
or RX_QUAL_UL > RX_QUAL_HO_NHCH_UL
then execute handover NHCH -> HCH.

5 When the above statements are true, i.e. the
handover is carried out, a new traffic channel will be
selected from the free traffic channels included in
another hopping group. Prior to the handover it must
first be checked that on the new channel the
10 interference of the free channel is sufficiently low.

 The latter of the above algorithms is also
responsible for that the terminal equipment switches
from a non-hopping channel onto a hopping channel when
the terminal equipment moves away from the base station
15 and the quality of the connection weakens due to a low
signal strength.

 Let us assume, for instance, that the preset
parameters have the following values:

20 RX_QUAL_HO_HCH_DL: 1
 RX_QUAL_HO_NHCH_DL: 3
 RX_QUAL_HO_HCH_UL: 1
 RX_QUAL_HO_NHCH_UL: 3.

25 With these exemplary settings the call shifts
from a hopping channel onto a non-hopping channel if the
averaged quality of the connection is zero in both
directions, i.e. the bit-error ratio BER < 0.2 %. The
call shifts from a non-hopping channel onto a hopping
30 channel if the averaged quality of the connection is
poorer than 3, i.e. BER > 1.6 % in either of the
transmission directions.

Inter-cell handover

35 The need for intercell handover arises mostly
when the terminal equipment MS is moving in accordance

WO 96/04722

PCT/FI95/00412

12

with Figure 6 from the area served by base station BTS1 to the audibility area served by another base station BTS2. The handover frequently takes place in a location where the terminal equipment is located remote from the target base station, and the probability that a good traffic channel is required is high. In the method of the invention, a frequency hopping traffic channel is assigned for the terminal equipment in the inter-cell handover if there is one available.

In the above, applying the invention in a system utilizing the frequency hopping technique is described. However, the method of the invention may also be applied in such a cellular communication system in which frequency hopping is not in use. Owing to the propagation of radio waves, various carrier wave frequencies may have different values from the point of view of the interferences. Channel allocation for various connections may be carried out on the basis of interference measurements onto different frequencies, so that a connection having a poor quality of transmission is assigned a carrier wave frequency provided by a higher transmission quality.

Although the invention has been described above with reference to the examples in accordance with the accompanying drawings, it is obvious that the invention is not limited thereto, but it may be modified in various ways within the scope of the inventive idea set forth in the attached claims.

WO 96/04722

PCT/FI95/00412

15

a c t e r i z e d in that when the terminal equipment
(MS) is carrying out the handover from a base station
(BTS1) to another (BTS2), a frequency hopping traffic
channel is allocated for the terminal equipment at the
5 new base station (BTS2).

10. A method as claimed in claim 1, c h a r -
a c t e r i z e d in that the cellular communication
system is the GSM system.

10

15

20

25

30

35

WO 96/04722

PCT/FI95/00412

1/3

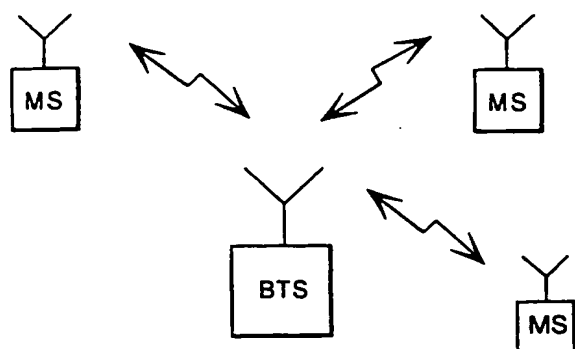


Fig. 1

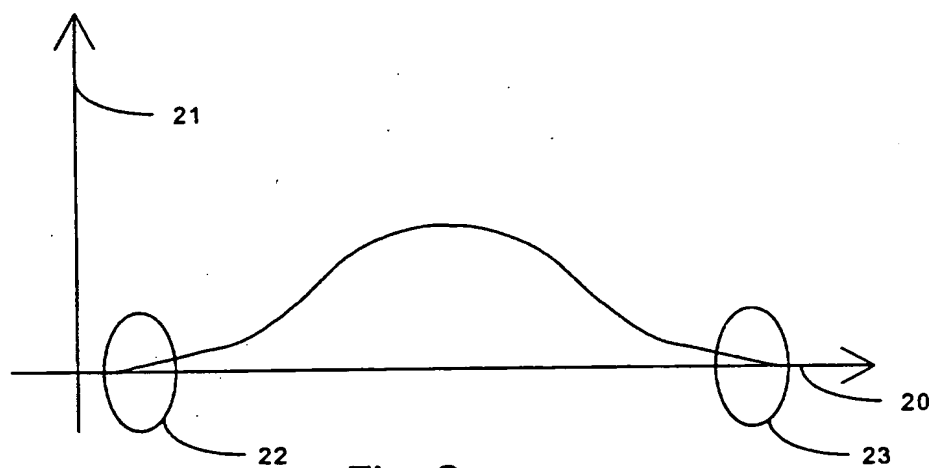


Fig. 2

TRX	TS0	TS1	TS2	TS3	TS4	TS5	TS6	TS7
1 BCCH	HG0	HG2						
2	HG1							
3								
4								

Fig. 3

TRX	TS0	TS1	TS2	TS3	TS4	TS5	TS6	TS7
1 BCCH	HG0							
2	HG1							

Fig. 4

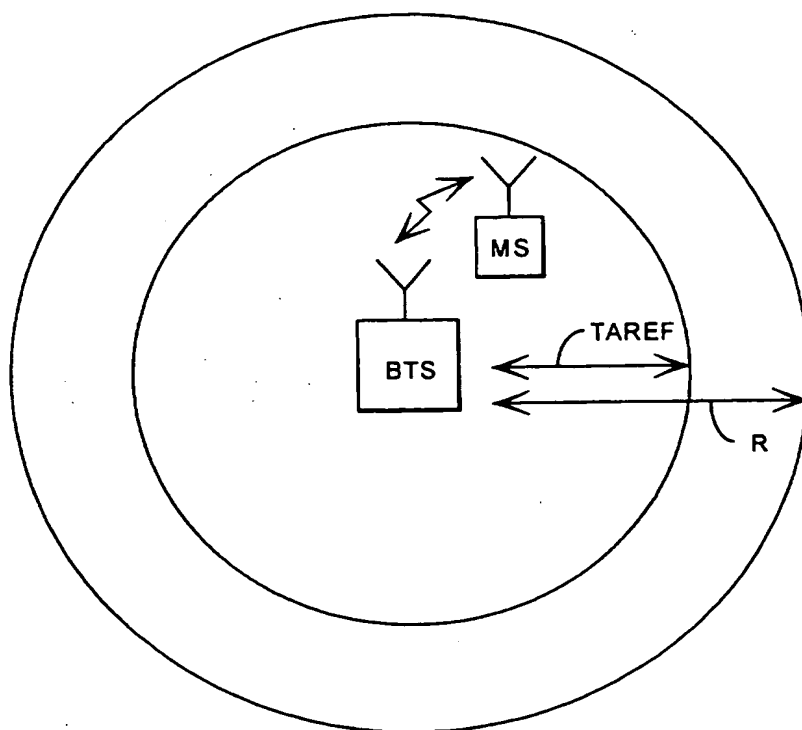


Fig. 5

WO 96/04722

PCT/FL95/00412

3 / 3

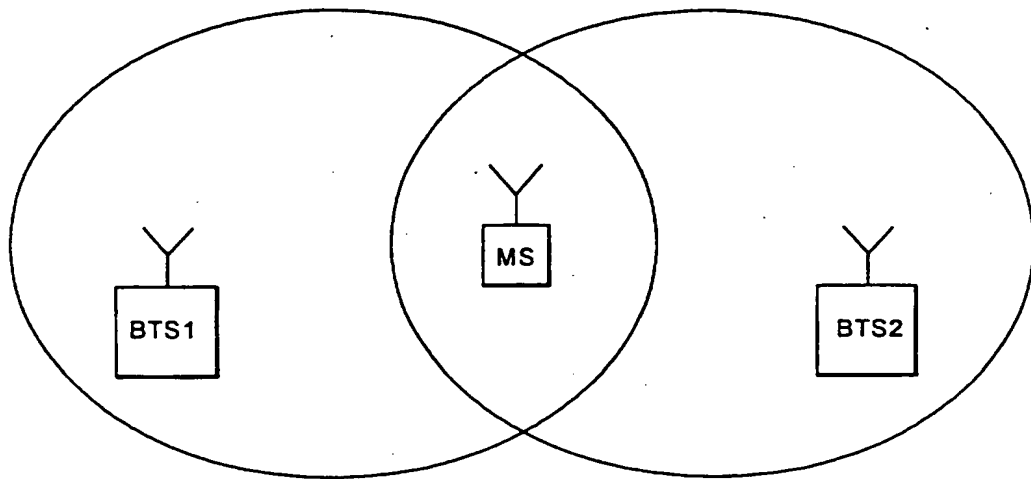


Fig. 6